

VEGA

WGB 1	WGS 6
----------	----------

30 000
h

5
5 YEARS
WARRANTY

Ø100		Ø100 12V (WGB100V)		Ø125		Ø150	
36 dB	95 m³/h	36 dB	90 m³/h	39 dB	180 m³/h	43 dB	225 m³/h
13 W	38 Pa	21 VA	34 Pa	15 W	50 Pa	17 W	48 Pa


	m³/h				W				Pa				dB(A)			
	1	2	3	4	1	2	3	4	1	2	3	4	1	2	3	4
WG*100CTR	40	75	85	95	5	7	9	14	10	26	32	38	19	31	34	36
WG*125CTR	50	80	120	180	5	7	10	16	5	10	20	50	19	26	31	39
WG*150CTR	80	128	180	225	6	9	12	18	5	9	15	48	22	30	39	43




GLÓWNE CECHY / MAIN FEATURES

- tworzywo ABS / ABS plastic
- łożyska kulkowe / ball bearings
- IPX4
- maksymalna temperatura pracy 40°C / maximum operating temperature 40°C
- możliwość instalacji na suficie / ceiling installation allowed
- 5 lat gwarancji / 5 years warranty
- możliwość zainstalowania zaworu zwrotnego (ZZ) / non-return valve (ZZ) usage ability

WYPOSAŻENIE / EQUIPMENT

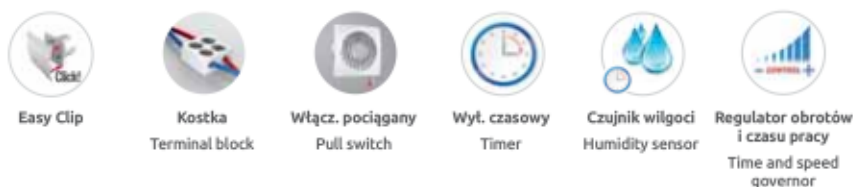

WYMIARY / DIMENSIONS

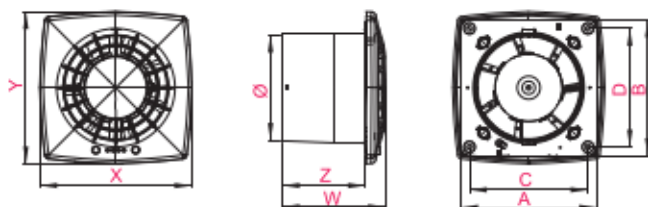

	Ø	A	B	X	Y	W	Z
Ø100	100	109	109	140	140	95	77
Ø125	125	137	137	172	172	95	77
Ø150	150	162	162	201	201	104	83



ŁOŻYSKA
KULKOWE
Ball bearings



4 KOŁKI ROZPOROWE
I WKRETY
4 rawplugs and screws

* Objaśnienie kolorów
/ Colour explanation:
WGB – kolor biały
/ white colour
WGS – kolor srebrna satyna
/ silver sateen colour



	INDEX			
Ø100	WG*100	●		
	WG*100W		●	
	WG*100T			●
	WG*100H		●	●
Ø125	WGB100V	12v		
	WG*100CTR			●
	WG*125	●		
	WG*125W		●	
Ø150	WG*125T			●
	WG*125H		●	●
	WG*125CTR			●
	WG*150	●		
	WG*150W		●	
WG*150T			●	
WG*150H			●	●
WG*150CTR			●	●